



SWDWP Commissioning

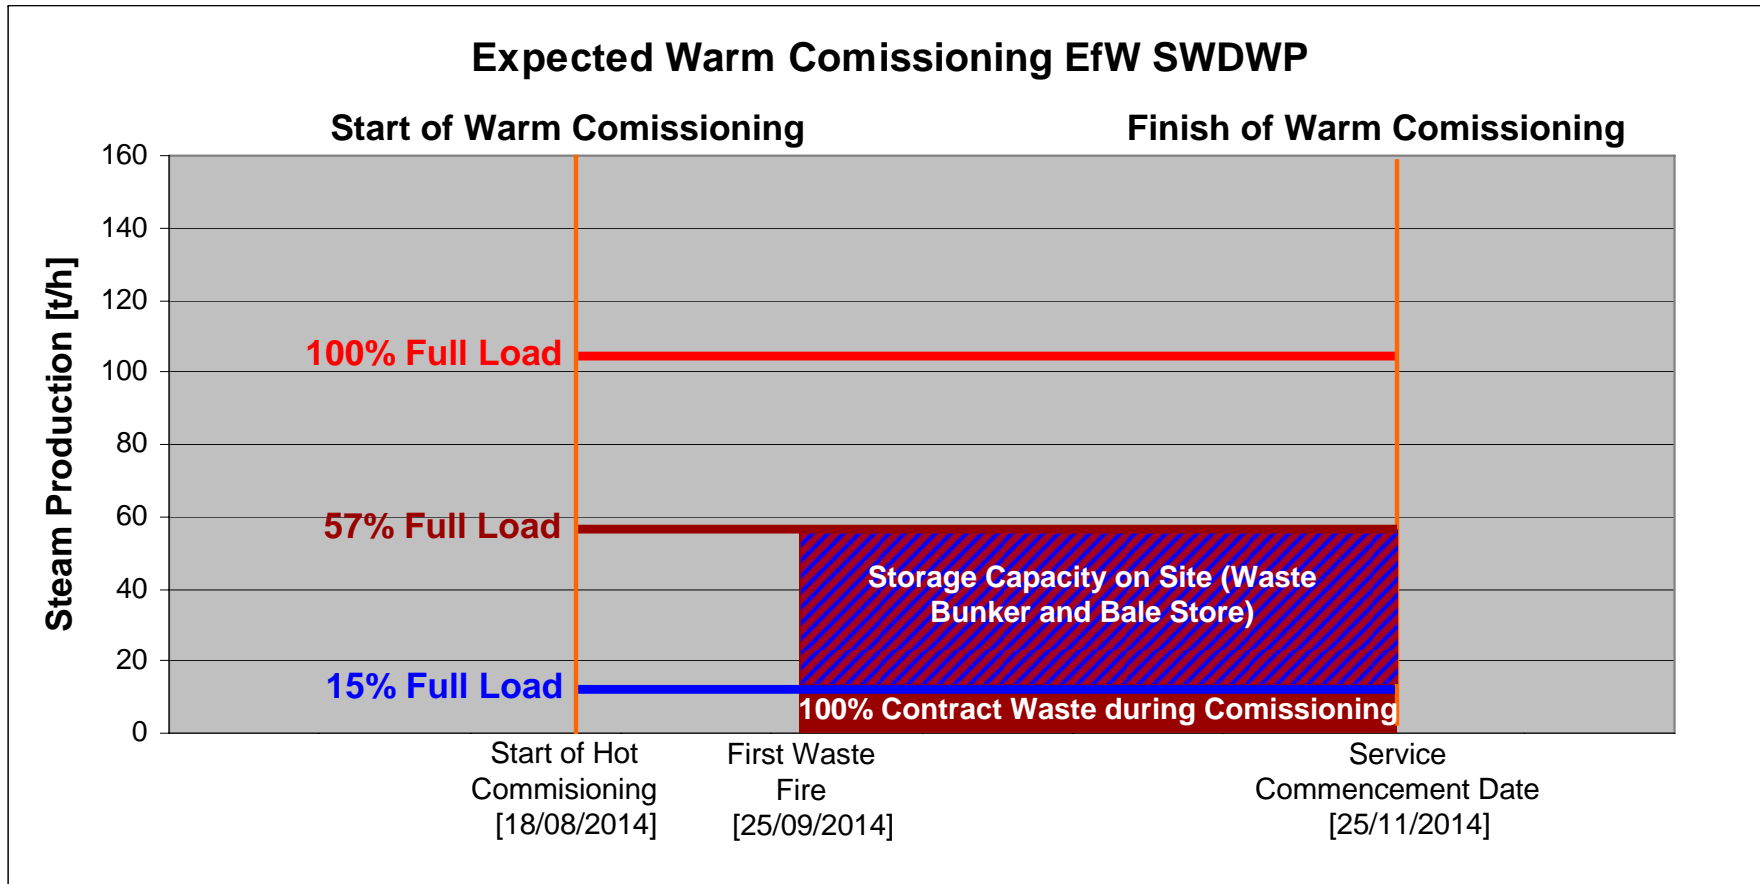

- 100% Contract Waste with a CV of 8.9 MJ/kg compares to 57% Full Load Capacity
- with full storage capacity on Site, only 15% Full Load Availability is necessary
- MVV'S averaged experience is appr. 77% Full Load Availability during Commissionings

Comissioning – Using the Example of TREA Boiler Line 2

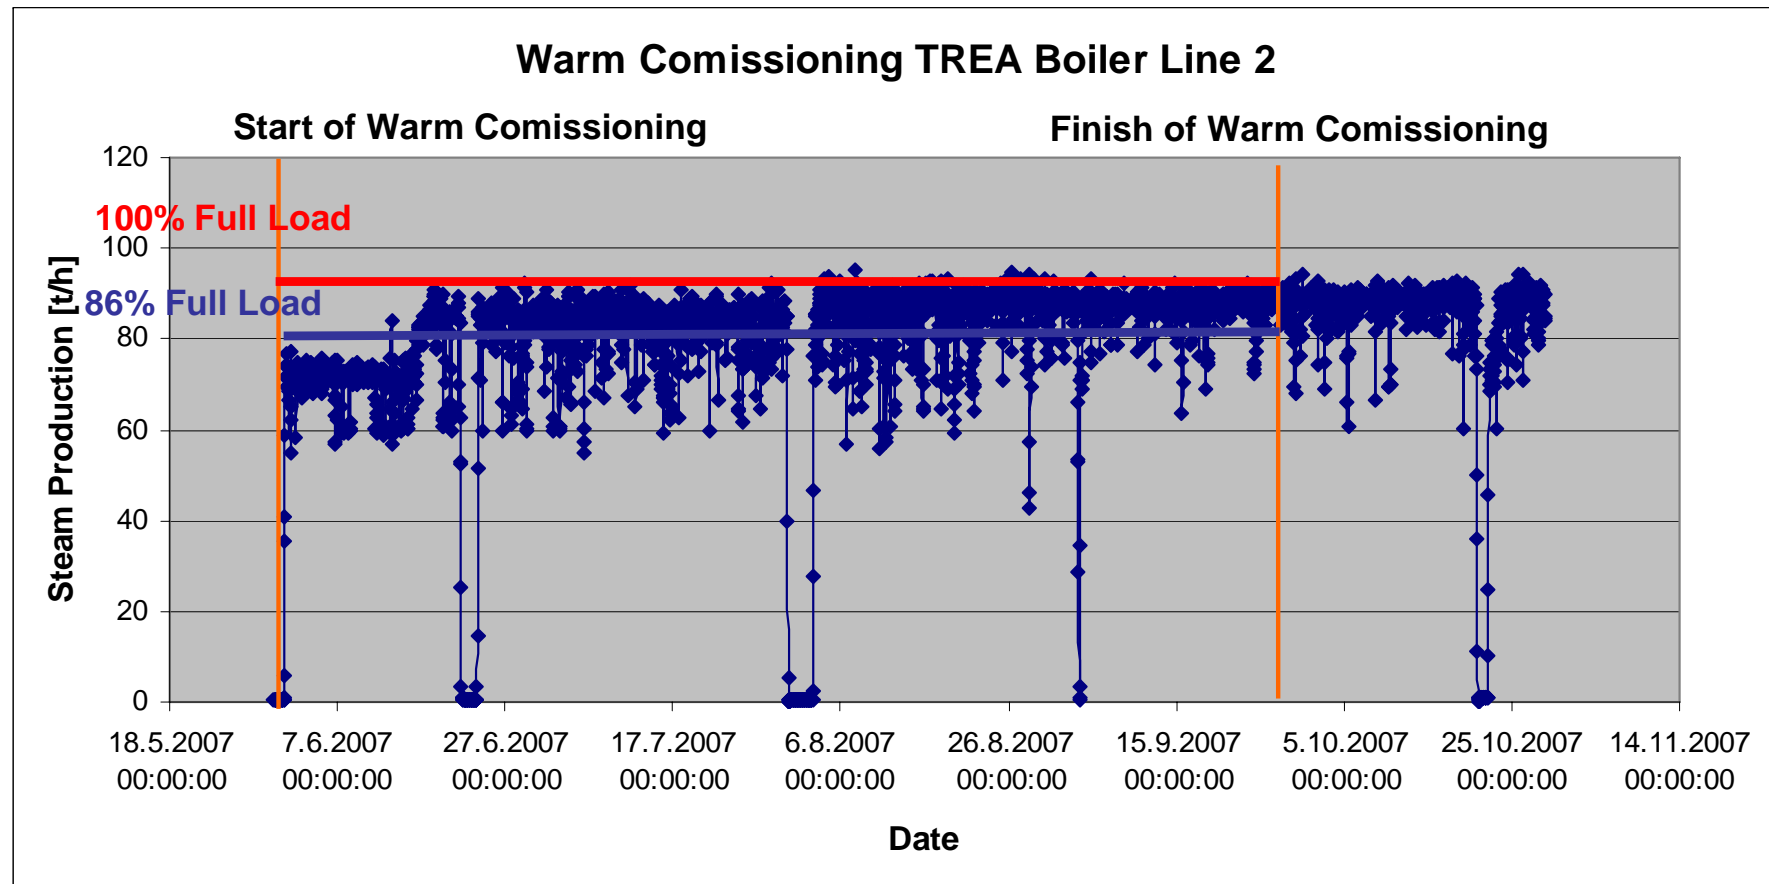

- Averaged 81t/h steam production during the 16 weeks of warm comissioning
- Compares to 86% of Full Load Availability